




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	03	Add the acetate tape	2007.01.26	向曉波
04	04	增加02-03pin醋酸膠布	2007.12.10	周禮軍
05	05	變更膠帶用料	19.06.2008	周禮軍
06	06	新增2*3pinCAP	2008.7.30	許承佑
07	07	變更新料號	2009.03.18	王群祥

### 1.Specifications

Current Rating: 1Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 300V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

### 2.Materials

Contact Material: Phosphor Bronze  
 Insulation Material: Polyester, UL 94V-0 LCP  
 All materials must meet Greenconn requirement for environment protection

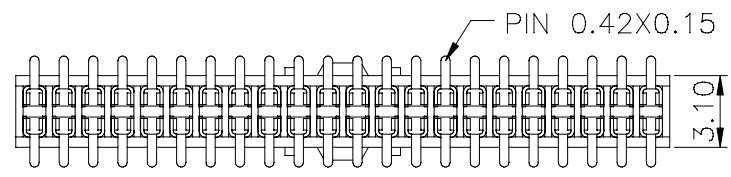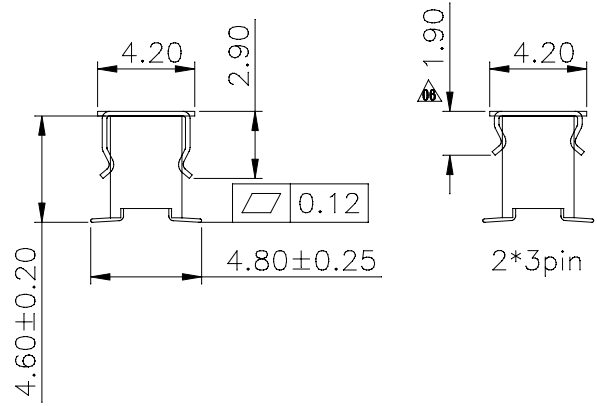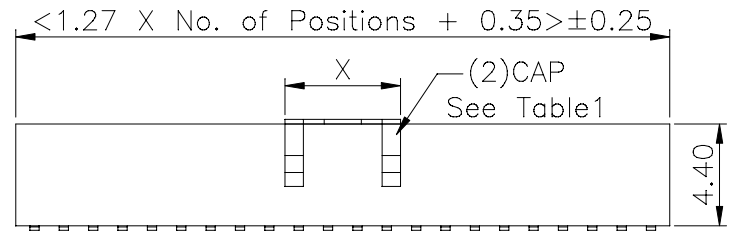

### Ordering Information


C SEC202 - XX XX A 001 C 1 A X

No. of Pins per Row 02~50  
 Standard Plating Color 02=Gold Flash 1=Black  
 Selective Plating 01=Tin  
 05=Gold Flash/Tin

Standard Packing E=(Manufacture+Cap)Tube  
 Selective Packing F=(Manufacture+Cap)Tape&Reel

Table1

NO.	Acetate Tape	NOTE
(1)	3.0mm	02~03pins
	5.1mm	04~25pins
	10mm	26~40pins
NO.	CAP(X)	NOTE
(2)	5mm	04~50pins
	4mm	03pin

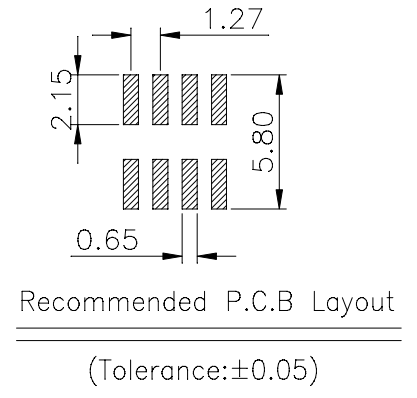

<b>格稜股份有限公司</b> <b>Greenconn Corporation</b>				GENERAL TOLERANCE X.* ± 5° X. ± 0.30 .X* ± 3° .X ± 0.25 .XX* ± 2° .XX ± 0.15 .XXX* ± 1° .XXX ± 0.10		DESIGN: 王群祥 CHECKED: AUDITED: APPROVED:	DATE:2009.03.18 DATE:2009.03.18 DATE:2009.03.18 DATE:2009.03.18	DWG. NO. CSEC202-A001C1AX	TITLE. 1.27 FEMALE HEADER DUAL ROWS SMT TYPE BASE 4.0H
				REV. 07 UNIT. mm SCALE. 3:1 PAGE. 1/1	PART NO. CSEC202-XXXXA001C1AX				