

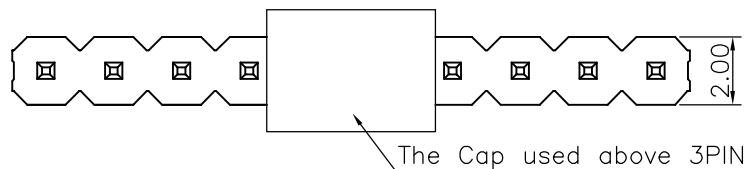


1 2 3 4 5 6 7 8 9

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2020.05.11	馮國東

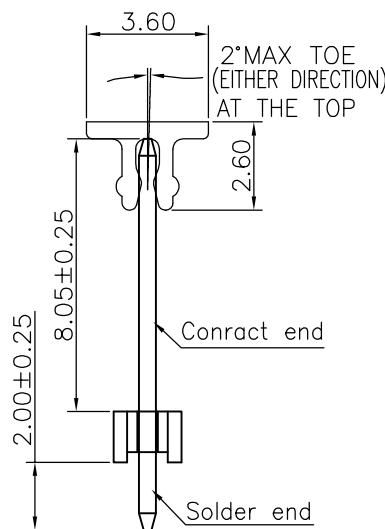

Specifications
 Current Rating:2.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon (Halogen Free) or the equivalent material
 All materials must meet Greenconn hazardous substances control standards.

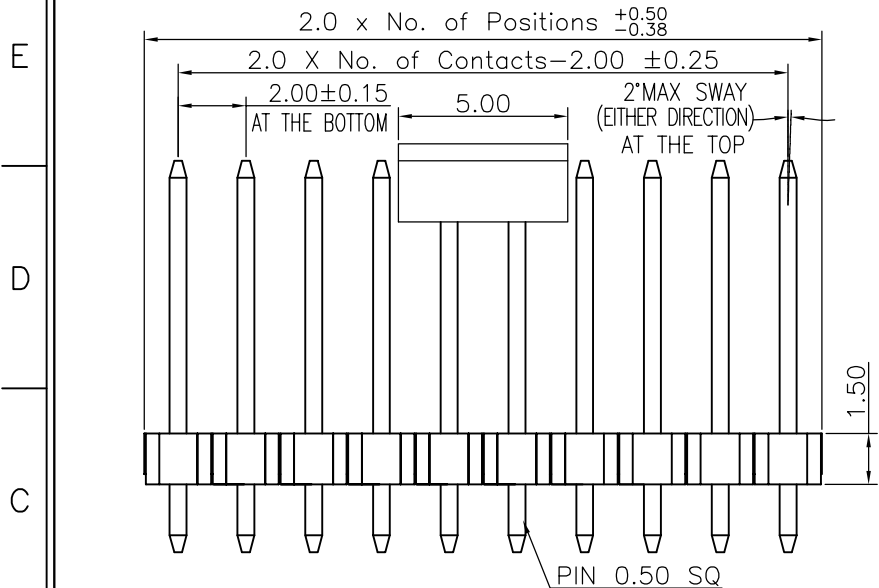


Ordering Information

G PFA102 - XX XX A 137 R 1 Z X

No. of Pins per Row 02~40
 Standard Plating 02=Gold Flash
 Selective Plating 01=Tin
 Color 1=Black
 Standard Packing A=Box
 Selective Packing C=Tube(無合適膠管)
 E=Cap+Tube(無合適膠管)
 F=Cap+Tape&Reel

Recommended P.C.Board Layout
 (Tolerance:±0.05)



A	格稜股份有限公司 Greenconn Corporation				GENERAL TOLERANCE		DESIGNED: 馮國東	DATE: 2020.05.11	DWG. NO.	TITLE. 2.00 PIN HEADER SINGLE ROW DIP TYPR CONNECTOR
					X.*±5.0*	X.±0.30	CHECKED: 曹熙	DATE: 2020.05.11	GPFA102-CA137RZ	
					.X*±3.0*	.X±0.25	CO SIGNED: 鐘隆進	DATE: 2020.05.11	PART NO.	
					.XX*±2.0*	.XX±0.15	APPROVED: 曹熙(代)	DATE: 2020.05.11	GPFA102-XXXX A137R1ZX	
REV.	UNIT.	SCALE.	PAGE.							
01	mm	5:1	1/1							

1 2 3 4 5 6 7 8 9