
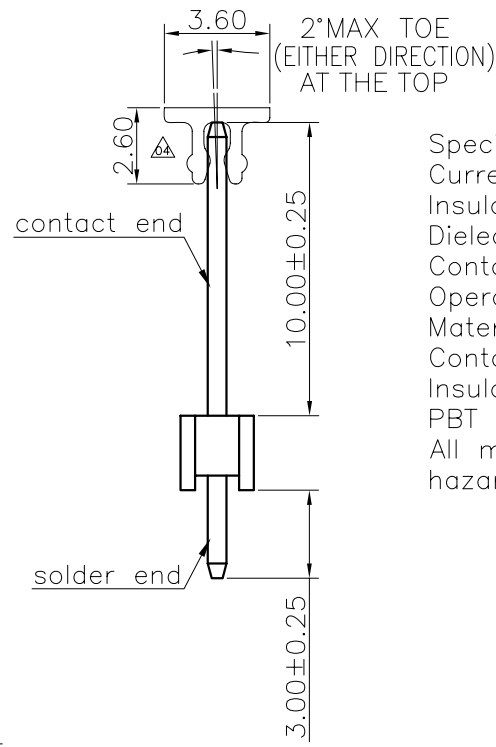


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	05-31-05	XIAO BING
02	△2	變更料號	2009.01.12	余曉斌
03	△3	變更圖號	2011.08.31	曹 熙
04	△4	依業務要求增加CAP	2015.03.27	李芳忠

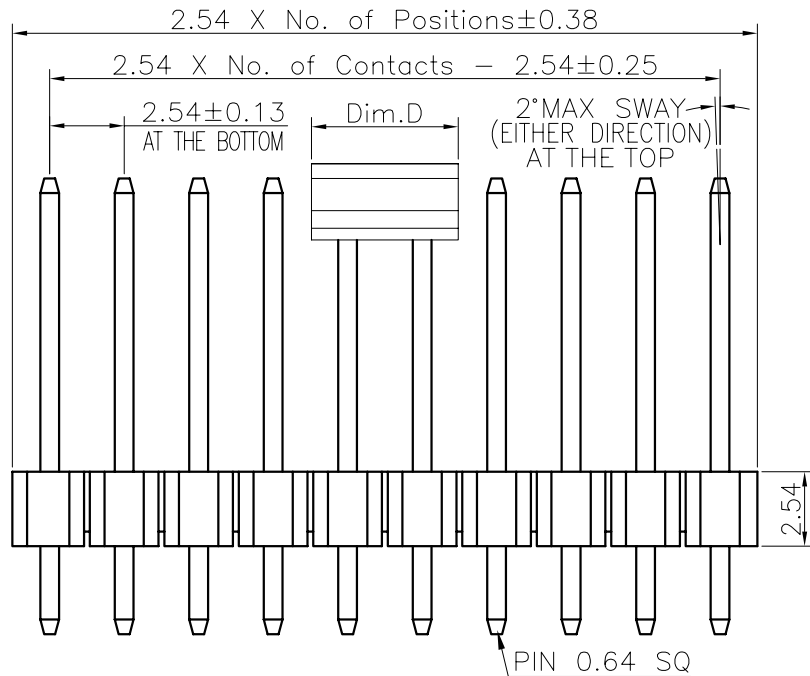

Specifications  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩMin.  
 Dielectric Withstanding Voltage: 600VAC  
 Contact Resistance: 20mΩMax.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material: Thermoplastic, UL 94V-0 PBT or the equivalent material  
 All materials must meet GREENCONN hazardous substances control standards.


### Ordering Information △

G PHA101 - XX XX A 010 A 1 B X

No. of Pins per Row 02~40  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin 05=Gold Flash/Tin  
 Color 1=Black  
 Standard Packing A=Box  
 Selective Packing C=Tube E=Cap+Tube F=Cap+Tape&Reel

Dim.D	NOTE
5.00mm	02Pins
6.50mm	03~40Pins

Recommended P.C.Board Layout  
 (Tolerance: ±0.05)

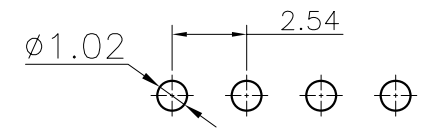

A

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED: 李芳忠  
 CHECKED:  
 CO SIGNED: 劉北平  
 APPROVED:

DATE: 2015.03.27  
 DATE:  
 DATE: 2015.03.27  
 DATE:

DWG. NO. △△  
 GPHA101-CA10AB  
 PART NO. △  
 GPHA101-XXXX A010A1BX

TITLE.  
 2.54 PIN HEADER  
 SINGLE ROWS DIP TYPE  
 BASE 2.54H

REV.	UNIT.	SCALE.	PAGE.	⊕
04	mm	4:1	1/1	